

# Accessing IPNew Web Services with certificates and claims-based authentication

v1.1

---

## 0 Version control

Date	Author	Version	Change
2018.10.01.	Szabó László	1.0	Creation
2024.12.10.	Szabó László	1.1	New application URLs will be introduced

# Contents

0 Version control .....	1
Introduction.....	3
Purpose of the document.....	3
User Authentication .....	3
Process of Authentication in Case of SOAP Requests .....	3
Web Service Addresses in the test environment .....	4
Web Service Addresses in the production environment.....	4
Creating a Sample Web service client with Visual Studio .....	5
app.config settings .....	5
Sample .net/C# code .....	6
Example of message exchange.....	7
Requesting a Token .....	7
Calling a Web Service with the acquired token.....	10
Testing with SoapUI.....	12
Creating a SoapUI Project.....	12
Set up Project parameters.....	13
Creating Requests.....	16
Links .....	20

## Introduction

With the introduction of the new version of RBP, Trading Platform, Information Platform, IPData and TSOData, the access of web services will slightly differ from the previous method. Web services can be accessed by using SOAP 1.1. and WS-Trust 1.3. protocols, with certificate and claims-based authentication.

## Purpose of the document

The present document provides information on the renewed RBP's web services (server-server connection) for those using these services for preparation and adaptation purposes. The description is valid for the Regional Booking Platform, the Trading Platform and the Information Platform, but it is not valid to the IPData and TSOData platforms.

## User Authentication

The services are exclusively available for authenticated users. The authentication of the users is done by an external authentication service (Active Directory Federation Services – AD FS), authentication must be performed prior to invoking the web service. The data package containing the data of the authenticated user (SAML token) must be attached to the web service request message to RBP, TP or IP in order that the server serves these requests.


### Process of Authentication in Case of SOAP Requests

In case of requesting the RBP, TP or IP web services, the requesting application (client) must use the WS-Trust 1.3. protocol. Although the WS-Trust protocol is fairly complicated and complex, in this case one should get acquainted only with the relevant parts thereof.

On the server side, two components have important role in authentication besides the directory:

- Relying Party (RP): The application or service that performs the business process, in this case RBP, TP or IP.
- Security Token Service (STS or Identity Provider or Issuer): the service performing the authentication and token issuance, in this case the AD FS. In case of the WS-Trust, the STS itself is also a SOAP webservice.

The authentication and requesting of webservice happens in multiple steps as described below:

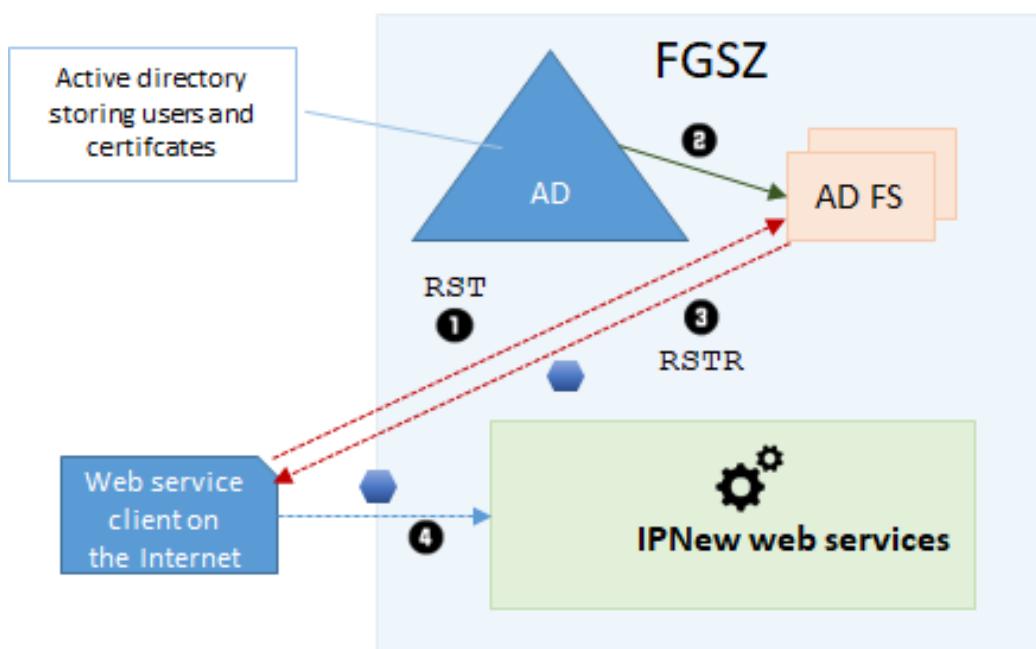

- 1.) As a first step, the client requests a special end point of the AD FS, the RST (Request Security Token) method, in which request it describes what kind of token it requests (e.g. SAML 1.1) and which RP it wants to communicate with. The request must contain the authentication data. In the production environments, only certificate-based authentication is foreseen to be permitted.
- 2.) The AD FS checks the authentication data.
- 3.) If the authentication data provided are correct, the AD FS provides the required token in a RSTR (Request Security Token Response) response.
- 4.) The client stores the token, and then attaches it to the RBP, TP or IP webservice requests in the SOAP message (in the security header) within the validity period of the token.

#### Web Service Addresses in the test environment

ADFS WSDL: <https://sts.test.rbp.eu/adfs/services/trust/mex>

ADFS endpoint for username/password authentication:

<https://sts.test.rbp.eu/adfs/services/trust/13/usernamemixed>

ADFS endpoint for X.509 certificate based authentication:

<https://sts.test.rbp.eu/adfs/services/trust/13/certificatemixed>

#### Web Service Addresses in the production environment

ADFS WSDL: <https://sts.rbp.eu/adfs/services/trust/mex>

ADFS endpoint for username/password authentication:

<https://sts.rbp.eu/adfs/services/trust/13/usernamemixed>

ADFS endpoint for X.509 certificate based authentication:

<https://sts.rbp.eu/adfs/services/trust/13/certificatemixed>

In case of business web services the address is available in the corresponding interface documentation. The <servername> placeholder should be replaced with the actual value for the respective environment. For Example:

Environment	Servername
Test	ip.uat.fgsz.hu ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT <b>(It will be phased out from 2025.10.01)</b>
Live	ip.fgsz.hu ipnew.fgsz.hu/Fgsz.Ip.Web <b>(It will be phased out from 2025.10.01)</b>

**Please note that from the date of 2025.10.01 the following <servername> list will be phased out.**

**Test:** ipnew.test.fgsz.hu

**Live:** ipnew.fgsz.hu

## Creating a Sample Web service client with Visual Studio

When creating a web service client, it is recommended to use a modern development tool (e.g. Visual Studio), which significantly simplifies the task by hiding complicated technical details. For testing purposes, a simple Console Application is enough. For leveraging certificate-based authentication, you need an X.509 client certificate that was previously assigned by FGSZ to your user account. You should also import the certificate with its private key on the client machine into a certificate store (e.g. Current User/Personal) to make it easier to refer to from code.

In this sample application the FGSZNNOService will be used.

### app.config settings

Start by creating a Visual Studio Project and adding a Service Reference to it. Provide the WSDL for the Web service when prompted. When adding a Service Reference, Visual Studio sets up the app.config file and also generates code in the background which refers the sts.test.fgsz.hu endpoint of ADFS. Our customers have to replace in the app.config file in the **issuer address**, **issuerMetadata address** and the **binding name** nodes the **sts.test.fgsz.hu** to **sts.test.rbp.eu**. In the production environment the value of **sts.rbp.eu** should be used.

Here is a sample app.config:

```
<?xml version="1.0" encoding="utf-8" ?>
<configuration>
  <startup>
    <supportedRuntime version="v4.0" sku=".NETFramework,Version=v4.6.1" />
  </startup>
  <system.serviceModel>
    <bindings>
      <ws2007FederationHttpBinding>
        <binding name="WS2007FederationHttpBinding_IFGSZNNOServiceSoapWrapper">
          <security mode="TransportWithMessageCredential">
            <message establishSecurityContext="false" issuedKeyType="BearerKey">
              <!--<issuer
address="https://sts.test.rbp.eu/adfs/services/trust/13/usernamemixed"
                binding="ws2007HttpBinding" bindingConfiguration="adfs" />-->
              <issuer
address="https://sts.test.rbp.eu/adfs/services/trust/13/certificatemixed"
                binding="ws2007HttpBinding" bindingConfiguration="adfs" />
              <issuerMetadata address="https://sts.test.rbp.eu/adfs/services/trust/mex" />
              <tokenRequestParameters>
                <trust:SecondaryParameters xmlns:trust="http://docs.oasis-open.org/ws-
sx/ws-trust/200512">
                  <trust:KeyType xmlns:trust="http://docs.oasis-open.org/ws-sx/ws-
trust/200512">http://docs.oasis-open.org/ws-sx/ws-trust/200512/Bearer</trust:KeyType>
                  <trust:CanonicalizationAlgorithm xmlns:trust="http://docs.oasis-
open.org/ws-sx/ws-trust/200512">http://www.w3.org/2001/10/xml-exc-
c14n#</trust:CanonicalizationAlgorithm>
```

```

        <trust:EncryptionAlgorithm xmlns:trust="http://docs.oasis-open.org/wss-
sx/ws-trust/200512">http://www.w3.org/2001/04/xmlenc#aes256-
cbc</trust:EncryptionAlgorithm>
            </trust:SecondaryParameters>
        </tokenRequestParameters>
    </message>
    </security>
</binding>
</ws2007FederationHttpBinding>
<ws2007HttpBinding>
    <binding name="adfs">
        <security mode="TransportWithMessageCredential">
            <transport clientCredentialType="None" />
            <!--<message clientCredentialType="UserName"
negotiateServiceCredential="false" establishSecurityContext="false" />-->
            <message clientCredentialType="Certificate" negotiateServiceCredential="false"
establishSecurityContext="false" />
        </security>
    </binding>
</ws2007HttpBinding>
</bindings>
<behaviors>
    <endpointBehaviors>
        <behavior name="certificateEndpointBehavior">
            <clientCredentials>
                <serviceCertificate>
                    <authentication certificateValidationMode="None" revocationMode="NoCheck"/>
                </serviceCertificate>
            </clientCredentials>
        </behavior>
    </endpointBehaviors>
</behaviors>
<client>
    <endpoint
address="https://ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT/Services/SOAPFGSZNNOService.svc"
        binding="ws2007FederationHttpBinding"
bindingConfiguration="WS2007FederationHttpBinding_IFGSZNNOServiceSoapWrapper"
        contract="FgszService.IFGSZNNOServiceSoapWrapper"
name="WS2007FederationHttpBinding_IFGSZNNOServiceSoapWrapper"
        behaviorConfiguration="certificateEndpointBehavior" />
    </client>
</system.serviceModel>
<system.net>
    <defaultProxy enabled="true" useDefaultCredentials="true">
        <!--<bypasslist> ... </bypasslist>
        <proxy> ... </proxy>
        <module> ... </module>-->
    </defaultProxy>
</system.net>
</configuration>

```

### Sample .net/C# code

The following C# code, or similar, can be used to call the service. The sample code (and the app.config above) is used for certificate-based authentication. If you want to use username/password authentication, you must comment out or delete the line below “// Certificate Authentication”, then remove comments (“//”) from the two lines under “//Windows Authentication” and enter the correct username and password instead of the asterisk characters. In the app.config, replace the “Issuer Address” and “Message clientCredentialType” elements with the username version (lines currently commented out).

```
using System;
```

```

using System.Collections.Generic;
using System.Linq;
using System.Net.Security;
using System.Security.Cryptography.X509Certificates;
using System.Text;
using System.Threading.Tasks;

namespace WsClientTest
{
    class Program
    {
        static void Main(string[] args)
        {
            System.Net.ServicePointManager.ServerCertificateValidationCallback =
                delegate (object sender, X509Certificate certificate, X509Chain chain,
SslPolicyErrors sslPolicyErrors)
                { return true; };

            var proxy = new FgszService.FGSZNNOServiceSoapWrapperClient();

            // Certificate authentication
            // Replace "tempClientcert" with the subject of your certificate

proxy.ClientCredentials.ClientCertificate.SetCertificate(StoreLocation.CurrentUser,
StoreName.My, X509FindType.FindBySubjectName, "tempClientcert");

//proxy.ClientCredentials.ServiceCertificate.Authentication.CertificateValidationMode =
System.ServiceModel.Security.X509CertificateValidationMode.None;
//proxy.ClientCredentials.ServiceCertificate.Authentication.RevocationMode =
X509RevocationMode.NoCheck;

            // Windows Authentication
//proxy.ClientCredentials.UserName.UserName = "testuser@ipnewtest.local";
//proxy.ClientCredentials.UserName.Password = "*****";
string result = proxy.CheckAlive();
Console.WriteLine(result);

            Console.ReadLine();
        }
    }
}

```

## Example of message exchange

By running the sample program, you can monitor traffic similar to the following HTTP message exchange.

### Requesting a Token

#### *Request Sample*

```

POST https://sts.test.rbp.eu/adfs/services/trust/13/certificatemixed HTTP/1.1
Content-Type: application/soap+xml; charset=utf-8
Host: sts.test.rbp.eu
Content-Length: 4638
Expect: 100-continue
Accept-Encoding: gzip, deflate
Connection: Keep-Alive

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing" xmlns:u="http://docs.oasis-

```

```

open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"><s:Header><a:Action
s:mustUnderstand="1">http://docs.oasis-open.org/ws-sx/ws-
trust/200512/RST/Issue</a:Action><a:MessageID>urn:uuid:f9aa5885-174e-4fa8-8e38-
4b35520078a5</a:MessageID><a:ReplyTo><a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address></a:ReplyTo><a>To s:mustUnderstand="1"
u:Id="_1">https://sts.test.rbp.eu/adfs/services/trust/13/certificatemixed</a:To><o:Security
s:mustUnderstand="1" xmlns:o="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd"><u:Timestamp u:Id="_0"><u:Created>2018-03-
09T12:35:18.852Z</u:Created><u:Expires>2018-03-
09T12:40:18.852Z</u:Expires></u:Timestamp><o:BinarySecurityToken u:Id="uuid-d4b24929-31e2-
49ad-95a3-b8f4e8275032-1" ValueType="http://docs.oasis-open.org/wss/2004/01/oasis-200401-
wss-x509-token-profile-1.0#X509v3" EncodingType="http://docs.oasis-
open.org/wss/2004/01/oasis-200401-wss-soap-message-security-
1.0#Base64Binary">MIIDBjCCAfKgAwIBAgIQY2AkVw4NyY9ARCBjGn1CKjAJBgUrDgMCHQUAMBsxGTAXBgNVBAMT
EFJvb3RDYUNsaWVudFRlc3QwHcNMTgwMzAxMDkxNDIzWhcNMzkxMjMxMjM10TU5wJAZMRcwFQYDVQQDEw50ZW1wQ2
xpZW50Y2VydDCCASIwDQYJKoZIhvCNQEBBQADggEPADCCAQoCggEBANvOrgbeL/kgdRrD3DnnQZ6G07+LaLDAPum/
bdgFea4LkCiYUP6QHGUw57kEZ1ZaKU+jJHRfxZzbussuILGNJaw3gEy533R702MNeDyglvSSYHU9mnfKkir0/Jj/
asn6Wkk+W6zwXkbH3uTRV3Z60Yv5r55QK/4cryCsvz1qYASLYBe0gW9nh0w8V79a60U+Ydw8pXZsTaz7xbzfX4am6q
+TpoGYCEBpkni0Golt/H7MaOud8XybUv/RnqjIUetbz0f36Ynom1sviiKXv29H3QT91E0BaLkXj4AhBsvQ245nf1k
KVT/gd0oQ4gWqP30ZMWJub9fK0nF24UiZUDpECAwEAAaNQME4wTAYDVR0BBEuwQ4AQ3osAzHoU12fYN09rdfjTvqEd
MBsxGTAXBgNVBAMTEFJvb3RDYUNsaWVudFRlc3SCEJ563a90H60mRjCpyUVHj1kwCQYFKw4DAh0FAAOCAQEAVkV8ox
/Wi+dmncXccJZDQjuVhYEKRvgXCNWlJcfhf57SsIq4CV4P9NSKaKAsEZ1sDWFSJ3Luava9nZT/hx6mcC/enCulo8gW
4P1gsaGz2Z4pgtI8V7cF/vkYA4k4od9wTnN82zzH1szdHQuN2CwTo+QmvK9QhNffuwehBL5dJGPcxKWq1ldZzQ76Kb
KdzR2+NHN24m7qYZ+pcNEge5yENT3XFqHMVXRaBnjqkBpzCLDvYhvt9BQC2e7DAPK5fnqdMvfut1Qgh43V4LAnW4K
Ts5ZldMHriwidAs73VcysxitYKFgAOD6IrrQW71wdTUGkWUqdvF0/UjgRCMm9yUQGQ==</o:BinarySecurityToke
n><Signature
xmlns="http://www.w3.org/2000/09/xmldsig#"><SignedInfo><CanonicalizationMethod
Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#"><SignatureMethod
Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha1"/><Reference
URI="#_0"><Transforms><Transform Algorithm="http://www.w3.org/2001/10/xml-exc-
c14n#" /></Transforms><DigestMethod
Algorithm="http://www.w3.org/2000/09/xmldsig#sha1"/><DigestValue>FlASDEG7MEZw8w0FX2G4VD3yX
y0=</DigestValue></Reference><Reference URI="#_1"><Transforms><Transform
Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" /></Transforms><DigestMethod
Algorithm="http://www.w3.org/2000/09/xmldsig#sha1"/><DigestValue>GFhi1zZiaiGWSd/40vt2XyoaQ
vw=</DigestValue></Reference></SignedInfo><SignatureValue>CQoemS3joXqnHzS541E8u34BC74jzHDQ
u7vkQJF/8T460llXxhmhVuSuxb7ubCzX2M3AnKynBtBVq08ZnWyFBhVABOqWfhICOcqAU19hvEkPNloW97ZWExjxmI
saX0WHpNpdWcojG/szZOGsTF6yivCaXoIYz4hBUxYyCbX6iYYbK96vuLHZJhWTrkwagyxnu/3oCVJHIielHmS6n18z
sjehMB0o20KFr1s3zK0iVIdfG4Xjt5In1JobxT6cSnQKDBKJduJQG6Nn/2WYEwZxIpqex1c+SMeQEMq3xYeK5dk3uC
WMr+4a0GbHh9d1lRnpXE04h9XA306z1p2kWLryg==</SignatureValue><KeyInfo><o:SecurityTokenRefere
nce><o:Reference ValueType="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-x509-
token-profile-1.0#X509v3" URI="#uuid-d4b24929-31e2-49ad-95a3-b8f4e8275032-
1"/></o:SecurityTokenReference></KeyInfo></Signature></o:Security></s:Header><s:Body><trus
t:RequestSecurityToken xmlns:trust="http://docs.oasis-open.org/ws-sx/ws-
trust/200512"><trust:RequestType>http://docs.oasis-open.org/ws-sx/ws-
trust/200512/Issue</trust:RequestType><wp:AppliesTo
xmlns:wp="http://schemas.xmlsoap.org/ws/2004/09/policy"><EndpointReference
xmlns="http://www.w3.org/2005/08/addressing"><Address>https://ipnew.test.fgsz.hu/Fgsz.Ip.W
eb.UAT/Services/SOAPIpDataSecurityService.svc</Address></EndpointReference></wp:AppliesTo
><trust:KeyType>http://docs.oasis-open.org/ws-sx/ws-
trust/200512/Bearer</trust:KeyType><trust:SecondaryParameters>&#xD;
    <trust:KeyType>http://docs.oasis-open.org/ws-sx/ws-
trust/200512/Bearer</trust:KeyType>&#xD;
        <trust:CanonicalizationAlgorithm>http://www.w3.org/2001/10/xml-exc-
c14n#</trust:CanonicalizationAlgorithm>&#xD;
            <trust:EncryptionAlgorithm>http://www.w3.org/2001/04/xmlenc#aes256-
cbc</trust:EncryptionAlgorithm>&#xD;

```

### Response Sample

HTTP/1.1 200 OK

Content-Length: 6803  
Content-Type: application/soap+xml; charset=utf-8  
Server: Microsoft-HTTPAPI/2.0  
Date: Fri, 09 Mar 2018 12:35:21 GMT

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"  
    xmlns:a="http://www.w3.org/2005/08/addressing" xmlns:u="http://docs.oasis-  
    open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"><s:Header><a:Action  
    s:mustUnderstand="1">http://docs.oasis-open.org/ws-sx/ws-  
    trust/200512/RSTRC/IssueFinal</a:Action><a:RelatesTo>urn:uuid:f9aa5885-174e-4fa8-8e38-  
    4b35520078a5</a:RelatesTo><o:Security s:mustUnderstand="1" xmlns:o="http://docs.oasis-  
    open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd"><u:Timestamp  
    u:Id="_0"><u:Created>2018-03-09T12:35:21.894Z</u:Created><u:Expires>2018-03-  
    09T12:40:21.894Z</u:Expires></u:Timestamp></o:Security></s:Header><s:Body><trust:RequestSe-  
    curityTokenResponseCollection xmlns:trust="http://docs.oasis-open.org/ws-sx/ws-  
    trust/200512"><trust:RequestSecurityTokenResponse><trust:Lifetime><wsu:Created  
    xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-  
    1.0.xsd">2018-03-09T12:35:21.894Z</wsu:Created><wsu:Expires xmlns:wsu="http://docs.oasis-  
    open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">2018-03-  
    09T13:35:21.894Z</wsu:Expires></trust:Lifetime><wsp:AppliesTo  
    xmlns:wsp="http://schemas.xmlsoap.org/ws/2004/09/policy"><wsa:EndpointReference  
    xmlns:wsa="http://www.w3.org/2005/08/addressing"><wsa:Address>https://ipnew.test.fgsz.hu/F  
    gsz.Ip.Web.UAT/Services/SOAPIpDataSecurityService.svc</wsa:Address></wsa:EndpointReference  
></wsp:AppliesTo><trust:RequestedSecurityToken><saml:Assertion MajorVersion="1"  
    MinorVersion="1" AssertionID="_4e0cb07c-4a87-44bf-92ce-0b3bd02582bb"  
    Issuer="http://sts.test.rbp.eu/adfs/services/trust" IssueInstant="2018-03-  
    09T12:35:21.894Z" xmlns:saml="urn:oasis:names:tc:SAML:1.0:assertion"><saml:Conditions  
    NotBefore="2018-03-09T12:35:21.894Z" NotOnOrAfter="2018-03-  
    09T13:35:21.894Z"><saml:AudienceRestrictionCondition><saml:Audience>https://ipnew.test.fgs  
    z.hu/Fgsz.Ip.Web.UAT/Services/SOAPIpDataSecurityService.svc</saml:Audience></saml:Audience  
    RestrictionCondition></saml:Conditions><saml:AttributeStatement><saml:Subject><saml:Subjec  
    tConfirmation><saml:ConfirmationMethod>urn:oasis:names:tc:SAML:1.0:cm:bearer</saml:Confirm  
    ationMethod></saml:SubjectConfirmation></saml:Subject><saml:Attribute AttributeName="name"  
    AttributeNamespace="http://schemas.xmlsoap.org/ws/2005/05/identity/claims"><saml:Attribute  
    Value>IPNEWTEST\eburany</saml:AttributeValue><saml:AttributeValue>tempClientcert</saml:Att  
    ributeValue></saml:Attribute><saml:Attribute AttributeName="upn"  
    AttributeNamespace="http://schemas.xmlsoap.org/ws/2005/05/identity/claims"><saml:Attribute  
    Value>eburany@ipnewtest.local</saml:AttributeValue></saml:Attribute></saml:AttributeState  
    ment><saml:AuthenticationStatement  
    AuthenticationMethod="urn:oasis:names:tc:SAML:1.0:am:X509-PKI"  
    AuthenticationInstant="2018-03-  
    09T12:35:21.878Z"><saml:Subject><saml:SubjectConfirmation><saml:ConfirmationMethod>urn:oas  
    is:names:tc:SAML:1.0:cm:bearer</saml:ConfirmationMethod></saml:SubjectConfirmation></saml:  
    Subject></saml:AuthenticationStatement><ds:Signature  
    xmlns:ds="http://www.w3.org/2000/09/xmldsig#"><ds:SignedInfo><ds:CanonicalizationMethod  
    Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#"><ds:SignatureMethod  
    Algorithm="http://www.w3.org/2001/04/xmldsig-more#rsa-sha256"/><ds:Reference  
    URI="#_4e0cb07c-4a87-44bf-92ce-0b3bd02582bb"><ds:Transforms><ds:Transform  
    Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-signature"/><ds:Transform  
    Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#"></ds:Transforms><ds:DigestMethod  
    Algorithm="http://www.w3.org/2001/04/xmlenc#sha256"/><ds:DigestValue>IbJHvrT2lrACeoovH/76H  
    rez/8yXgQ1UM3y6300fd08=</ds:DigestValue></ds:Reference></ds:SignedInfo><ds:SignatureValue>  
    KKU6oopRUSUVDuIdDuo7y/x+0HsRLs125yeHzCRMEcgHldYXYBQIVuSjyoDk08scg9Gyib9U8AUQJAVlXxsnZt2Wn  
    x19webYrk0nH7VEZffojpycQHjWN6+R31HsXc80wBqtF+m1V1PEImNhSv+cmCnHiMkNfGCxEZMt3vIZR01oDCSFm3u  
    05enOnILq4hkgb7kd/jhSfa7kZHgzjyY6QmfcYIRBPu27p9zyT495DVSR+L9etkZH1BrvzCPTTh3TbX9CTWh1uZUsE  
    ++mu/nmY84VUV2nwdqd1fwKQM2nAeh02HzmGy/a2kHZdF6GIAlg2NNmtcrQX49NUv7a3CZFg==</ds:SignatureVa  
    lue><KeyInfo  
    xmlns="http://www.w3.org/2000/09/xmldsig#"><X509Data><X509Certificate>MIIDEDCCAfigAwIBAgIQ  
    HIgjaxlQUI9Fpn/u6ofQnjANBgkqhkiG9w0BAQsFADBEMUIwQAYDVQQDEzlBREZTIFNpZ25pbmcgLSBpcG51d3Rlc3  
    RhZC5ub3J0aGV1cm9wZS5jbG91ZGFwcC5henVyZS5jb20wHhcNMTgwMjE3MTYxMjUzWhcNMTkwMjE3MTYxMjUzWjBE  
    MUIwQAYDVQQDEzlBREZTIFNpZ25pbmcgLSBpcG51d3Rlc3RhZC5ub3J0aGV1cm9wZS5jbG91ZGFwcC5henVyZS5jb2  
    0WggEiMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQCI185fR2bsFXZobfoWIDZrqRy8//lyF06iVYf20Qa/rJyB  
    1ZkKZFvwXt5L0+Nzt0FqbRHv37qAbEwuu0NyNzVzFa99hd3AncKuYHXgJr5PFEXNu7eI2nxtpxQNsjgedxqt1R2dR
```

```

s/k3wvWy+ltEQKYyZ3maZmXEz+vU2kQhbzajTne0C+XEjNGic5+dhBbCKcRU7aYU1jZJy/Nv+U5hMGCCwAomziZ5rAPtp09vU781zUhczpDa6tPqQiY4N/a8qong+kYY11LyJvluykaizHzMyJU7b0aKTZfV8vMuEERc6WDseI4HfdhtTY00M55TpQgBaphW80x/8/OgG85w3rAgMBAAEwDQYJKoZIhvcNAQELBQADggEBAAucCoXRfg4mnwfzBVah36NAQn2kCfdau3sqet8nQXPXWStU281P2tiF8pspz5Bb1Uw1bE03MwGm6+o2YPd6gnYpwYtWdmCYYFIzgQRU8nCzk4zw98I206Jxs7kDMAocaIIInIjs//4SnVHH3PSe29lw26ga2yAk6WmMSdPWze6zCspNsKBjww8vhkh9GknAPXWu0gCyHfG+ehEzfxXIx4ieJEodFNgmGuk97SWnMAkZdBlrZ1mVZWAMQI7Ata0u6jjvgD0GgmwyHMvEV83GdK0vKzR+vCb3X41L4Me/Fym7nxWZBEIRDqZEzida6EQK2ceuiobFzhKx/xwJIoVknUI=</X509Certificate></X509Data></KeyInfo></ds:Signature></saml:Assertion></trust:RequestedSecurityToken><trust:RequestedAttachedReference><o:SecurityTokenReference k:TokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV1.1" xmlns:o="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd" xmlns:k="http://docs.oasis-open.org/wss/oasis-wss-wssecurity-secext-1.1.xsd"><o:KeyIdentifier ValueType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.0#SAMLAssertionID">_4e0cb07c-4a87-44bf-92ce-0b3bd02582bb</o:KeyIdentifier></o:SecurityTokenReference></trust:RequestedAttachedReference><trust:RequestedUnattachedReference><o:SecurityTokenReference k:TokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV1.1" xmlns:o="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd" xmlns:k="http://docs.oasis-open.org/wss/oasis-wss-wssecurity-secext-1.1.xsd"><o:KeyIdentifier ValueType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.0#SAMLAssertionID">_4e0cb07c-4a87-44bf-92ce-0b3bd02582bb</o:KeyIdentifier></o:SecurityTokenReference></trust:RequestedUnattachedReference><trust:TokenType>urn:oasis:names:tc:SAML:1.0:assertion</trust:TokenType><trust:RequestType>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Issue</trust:RequestType><trust:KeyType>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Bearer</trust:KeyType></trust:RequestSecurityTokenResponse></trust:RequestSecurityTokenResponseCollection></s:Body></s:Envelope>
```

Calling a Web Service with the acquired token

#### *Request Sample*

```

POST https://ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT/Services/SOapFGSZNNOService.svc HTTP/1.1
Content-Type: application/soap+xml; charset=utf-8
Host: app.example.com
Content-Length: 5029
Expect: 100-continue
Accept-Encoding: gzip, deflate

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing" xmlns:u="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"><s:Header><a:Action s:mustUnderstand="1">http://service.fgsz.hu/IFGSZNNOServiceSoapWrapper/CheckAlive</a:Action><a:MessageID>urn:uuid:55832272-64d9-420a-a946-69de57a66df9</a:MessageID><a:ReplyTo><a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address></a:ReplyTo><a:To s:mustUnderstand="1">https://ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT/Services/SOapFGSZNNOService.svc</a:To><o:Security s:mustUnderstand="1" xmlns:o="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd"><u:Timestamp u:Id="_0"><u:Created>2018-03-09T12:35:21.904Z</u:Created><u:Expires>2018-03-09T12:40:21.904Z</u:Expires></u:Timestamp><saml:Assertion MajorVersion="1" MinorVersion="1" AssertionID="_4e0cb07c-4a87-44bf-92ce-0b3bd02582bb" Issuer="http://sts.test.rbp.eu/adfs/services/trust" IssueInstant="2018-03-09T12:35:21.894Z" xmlns:saml="urn:oasis:names:tc:SAML:1.0:assertion"><saml:Conditions NotBefore="2018-03-09T12:35:21.894Z" NotOnOrAfter="2018-03-09T13:35:21.894Z"><saml:AudienceRestrictionCondition><saml:Audience>https://ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT/Services/SOapFGSZNNOService.svc</saml:Audience></saml:AudienceRestrictionCondition></saml:Conditions><saml:AttributeStatement><saml:Subject><saml:SubjectConfirmation><saml:ConfirmationMethod>urn:oasis:names:tc:SAML:1.0:cm:bearer</saml:ConfirmationMethod></saml:SubjectConfirmation></saml:Subject><saml:Attribute AttributeName="name" AttributeNamespace="http://schemas.xmlsoap.org/ws/2005/05/identity/claims"><saml:AttributeValue>IPNEWTEST\eburany</saml:AttributeValue><saml:AttributeValue>tempClientcert</saml:AttributeValue></saml:Attribute><saml:Attribute AttributeName="upn" AttributeNamespace="http://schemas.xmlsoap.org/ws/2005/05/identity/claims"><saml:AttributeValue>eburany@ipnewtest.local</saml:AttributeValue></saml:Attribute></saml:AttributeStatement><saml:AuthenticationStatement
```

```

AuthenticationMethod="urn:oasis:names:tc:SAML:1.0:am:X509-PKI"
AuthenticationInstant="2018-03-
09T12:35:21.878Z"><saml:Subject><saml:SubjectConfirmation><saml:ConfirmationMethod>urn:oas
is:names:tc:SAML:1.0:cm:bearer</saml:ConfirmationMethod></saml:SubjectConfirmation></saml:
Subject></saml:AuthenticationStatement><ds:Signature
xmlns:ds="http://www.w3.org/2000/09/xmldsig#"><ds:SignedInfo><ds:CanonicalizationMethod
Algorithm="http://www.w3.org/2001/10/xml-exc-
c14n#"></ds:CanonicalizationMethod><ds:SignatureMethod
Algorithm="http://www.w3.org/2001/04/xmldsig-more#rsa-
sha256"></ds:SignatureMethod><ds:Reference URI="#_4e0cb07c-4a87-44bf-92ce-
0b3bd02582bb"><ds:Transforms><ds:Transform
Algorithm="http://www.w3.org/2000/09/xmldsig#enveloped-
signature"></ds:Transform><ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-
c14n#"></ds:Transform></ds:Transforms><ds:DigestMethod
Algorithm="http://www.w3.org/2001/04/xmlenc#sha256"></ds:DigestMethod><ds:DigestValue>IbJH
vrT2lrACeoovH/76Hrez/8yXgQ1UM3y6300fd08=</ds:DigestValue></ds:Reference></ds:SignedInfo><d
s:SignatureValue>KKu6oopRUSUvDuIdDuo7y/x+0HsRLs125yeHzCRMEcgth1dYXyBQIVuSjqoDk08scg9Gyib9U
8AUQJAV1XxsnZt2Wnx19webYrk0nH7VEZffojpycQHjWN6+R31HsXc80wBqtF+m1V1PEImNhSv+cmCnHiMkNfGCxEZ
Mt3vIZR01oDCSFm3u05enOnILq4hkgb7kd/jhSfa7kZHgzjyY6QmfccYIRBPu27p9zyT495DVSR+L9etkZH1BrvzCPT
Th3TbX9CTWh1uZUsE++mu/nmY84UVU2nwdqd1fwKQM2nAeh02HzmGy/a2kHZdf6GIAlg2NNmtcrQX49NUv7a3CZFg=
=</ds:SignatureValue><KeyInfo
xmlns="http://www.w3.org/2000/09/xmldsig#"><X509Data><X509Certificate>MIIDEDCCAfigAwIBAgIQ
HIgjaxlQUI9Fpn/u6ofQnjANBgkqhkiG9w0BAQsFADBEMUiwQAYDVQQDEz1BREZTIFNpZ25pbmcgLSBpcG51d3Rlc3
RhZC5ub3J0aGV1cm9wZS5jbG91ZGFwcC5henVyZS5jb20wHhcNMTgwMjE3MTYxMjUzWhcNMTkwMjE3MTYxMjUzWjBE
MUIwQAYDVQQDEz1BREZTIFNpZ25pbmcgLSBpcG51d3Rlc3RhZC5ub3J0aGV1cm9wZS5jbG91ZGFwcC5henVyZS5jb2
0wggiMA0GCSqGSIB3DQEBAQUAA4IBDwAwggEKAoIBAACQC138SfR2bsFXZobfolWIDZrqRy8//lyF06iVYf20Qa/rJyB
1ZkZFvwXt5L0+Nzt0FqbRHv37qAbEwuu0NyNzVzFa99hd3AncKuYHxgJr5PFEXNUu7eI2nxtpxQNsjgedxqt1R2dR
s/k3wvWy+ltEQKYyZ3maZmXEz+vU2kQhbzajTne0C+XEjNGic5+dhBbCKcRU7aYU1jZJy/Nv+U5hMGCCwAomziZ5rA
Ptp09vU781zUhczpDa6tPqQiY4N/a8qong+kYV11LyJvluYkaizHzMyJU7b0aKTZfV8vMuEERc6WDseI4HfdhtTY00
M55TpQgBaphW80x/8/OgG85w3rAgMBAEwDQYJKoZIhvcNAQELBQAQDggEBAAUcCoXRfg4mnwfzBVah36NAQn2kCfda
U3sqet8nQXPXWStU281P2tiF8pspz5Bb1Uw1bE03MwGm6+o2YPd6gnYpwYtWdmCYyFIZgQRU8nCzk4zw98I206JXs7
kDMAocaIIInIjs//4SnVHH3PSe29lw26ga2yAk6WmMSdPWze6zCspNsksBjww8vhkhK9GknAPXWu0gCyHfG+ehEfxfXI
x4ieJeadFNgmGuk97SwnMAkZdBlrZ1mVZWAMQI7Ata0u6JjvgD0GgmwyHMvEV83GdK0vKzR+vCb3X41L4Me/Fym7nx
WZBEirDqZEzida6EQK2ceuiobFzhKx/xwJIoVknUI=</X509Certificate></X509Data></KeyInfo></ds:Sign
ature></saml:Assertion></o:Security></s:Header><s:Body><CheckAlive
xmlns="http://service.fgsz.hu"
xmlns:b="http://schemas.datacontract.org/2004/07/WsClientTest.FgszService"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance"/></s:Body></s:Envelope>

```

### *Response Sample*

```

HTTP/1.1 200 OK
Content-Type: application/soap+xml; charset=utf-8
Server: Microsoft-IIS/10.0
X-Powered-By: ASP.NET
Date: Fri, 09 Mar 2018 12:35:22 GMT
Content-Length: 1567

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing" xmlns:u="http://docs.oasis-
open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://domain.service.fgsz.hu/IFGSZNNOServiceSoapWrapper/CheckAliveRe
      sponse</a:Action>
      <o:Security s:mustUnderstand="1" xmlns:o="http://docs.oasis-
      open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd">
        <u:Timestamp u:Id="_0">
          <u:Created>2018-09-02T09:11:03.596Z</u:Created>
          <u:Expires>2018-09-02T09:16:03.596Z</u:Expires>
        </u:Timestamp>
      </o:Security>
    </s:Header>

```

```

<s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <CheckAliveResponse xmlns="http://domain.service.fgsz.hu">
    <CheckAliveResult>The service is alive.</CheckAliveResult>
  </CheckAliveResponse>
</s:Body>
</s:Envelope>

```


## Testing with SoapUI

You can test the Web services without the creation of a program, by using a free tool such as SoapUI (<https://www.soapui.org/>) as described below.

### Creating a SoapUI Project


Create a new SOAP project, e.g. IPNew Test (File menu-> New SOAP Project menu item). In the Initial WSDL field enter the WSDL address of the IPNew Web service you want to use (e.g. <https://ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT/Services/SOAPFGSZNNOService.svc?singleWSDL>)

)

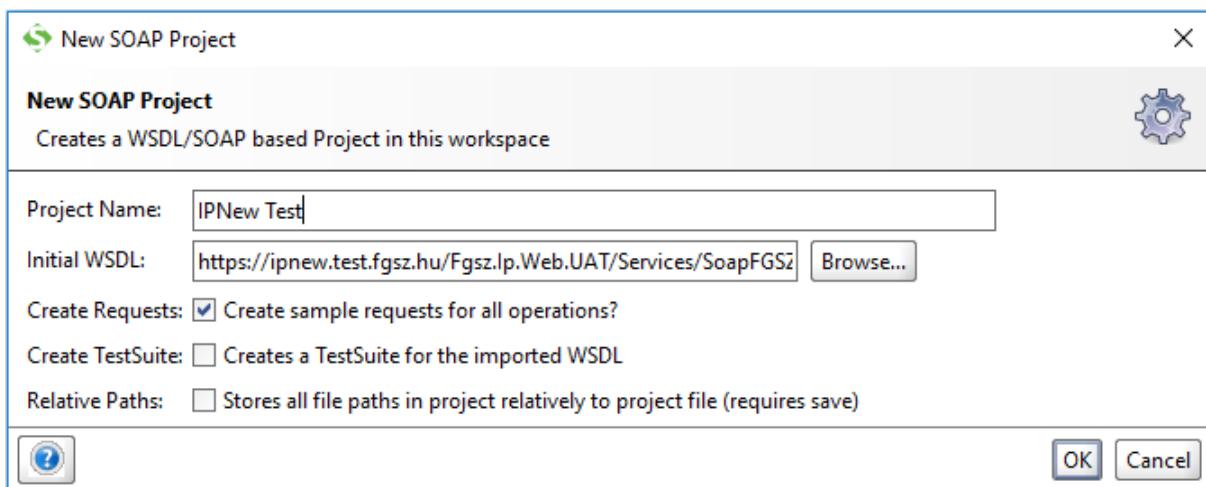

A new project is created, with an interface corresponding to the WSDL and with a sample request message for each Web method. We will use them during testing.

You should also add the ADFS Web services actions to your project. Right click on the name of the project and then choose “Add WSDL”. In the WSDL Location box, type the address for ADFS WSDL, such as: <https://sts.test.rbp.eu/adfs/services/trust/mex>. Sample messages for ADFS service methods are then created.

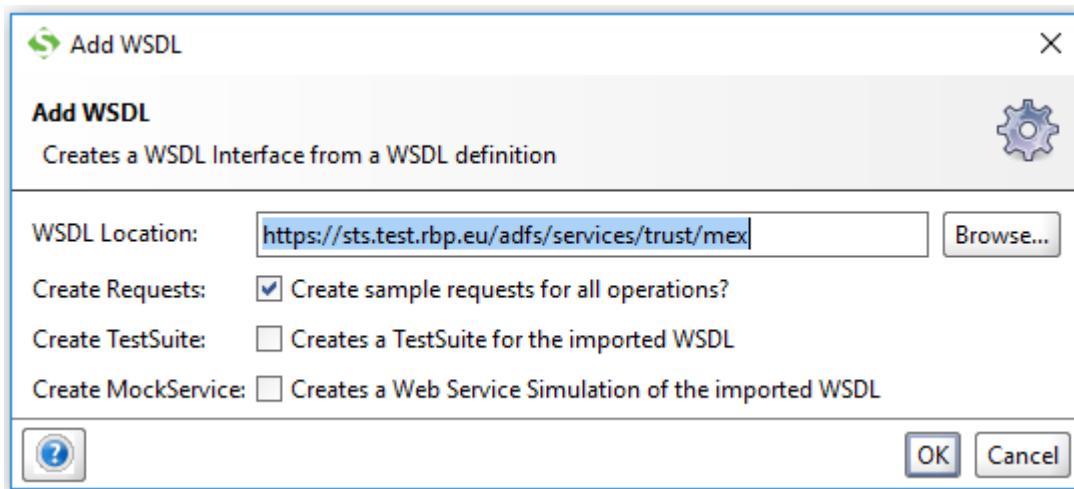


Set up Project parameters

*Set parameters required for certificate-based authentication*

For certificate-based authentication we need a client certificate, which is previously assigned by FGSZ to an AD user. To invoke the Web service, you will need a file containing the private and public key of the certificate (e.g. TestClient.pfx).


Double-click the SoapUI Project name, in the window that appears, click WS-Security Configuration tab, and the Keystores Tab inside it.

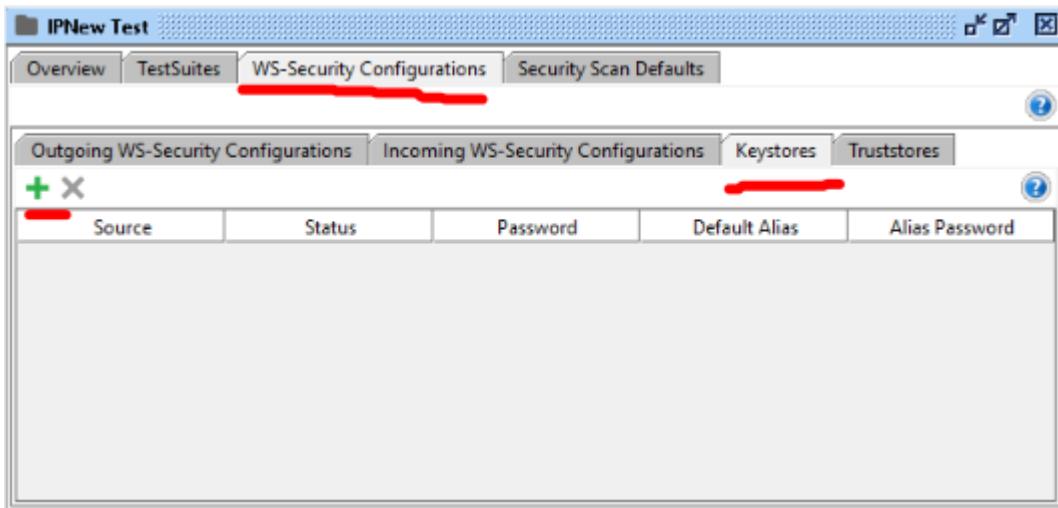

Click the green + icon, and in the File Selection window that appears, select the certificate file. If the file is password-protected, enter the password in the next window and press OK. Verify that "OK" is displayed in the Status field.

Source	Status	Password	Default Alias	Alias Password
C:\Work\CertAuthNP...	OK	*****		

Switch to “Outgoing WS-Security Configurations” tab, and then click the green + icon. In the window that appears, add any name for the configuration, such as “clientCert”. In the bottom section of the window, click the green + icon (Add a new WSS Entry). From the dropdown list select the Signature option.

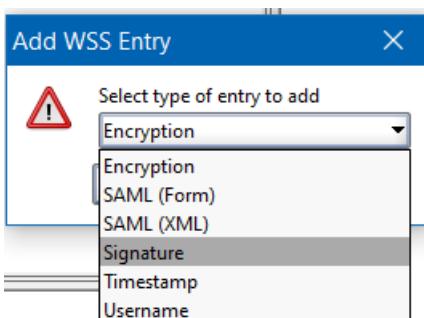

Fill in the fields of the Signature window as follows:

Keystore: the keystore we have previously added (certificate file).

Alias: the name of the key in the keystore.

Password: the password used to protect the certificate file.

Key Identifier Type: Binary Security Token

Signature Algorithm: <Http://www.w3.org/2000/09/xmldsig#rsa-sha1>

Signature Canonicalization: <http://www.w3.org/2001/10/xml-exc-c14n#>

Digest Algorithm: <Http://www.w3.org/2000/09/xmldsig#sha1>

Check the “Use Single Certificate” checkbox.

In the lower “Parts” section, enter a line with the following information:

Name Column: To

Namespace Column: <http://www.w3.org/2005/08/addressing>

Encode Column: Element

Name	Default Username/Alias	Default Password	Actor	Must Understand
clientCert				<input type="checkbox"/>

ID	Name	Namespace	Encode
To	http://www.w...	Element	

Create another line under the Signature entry using the green “+” icon and select “Timestamp”. Enter 300 into the Time To Live box.

Name	Default Username/Alias	Default Password	Actor	Must Understand
clientCert				<input type="checkbox"/>

Time To Live:	300
Millisecond Precision:	<input checked="" type="checkbox"/> Sets precision of timestamp to milliseconds

Create another configuration line under clientCert using the top green “+” icon. The name should be saml.

In the lower section, add a new Entry, the type must be SAML (XML). Do not add a value for it yet.

The screenshot shows the IPNew Test application window. In the top navigation bar, the 'WS-Security Configurations' tab is selected. Below it, a table lists two configurations: 'clientCert' and 'saml'. The 'saml' row has a blue selection bar underneath it. In the bottom-left pane, a tree view shows 'SAML (XML)' selected, and the right pane displays the XML code for an SAML assertion.

Name	Default Username/Alias	Default Password	Actor	Must Understand
clientCert				<input type="checkbox"/>
saml				<input checked="" type="checkbox"/>


SAML (XML)

```
<Enter SAML Assertion>
<1>
```

## Creating Requests

*Creating a Token Request for certificate-based identification*

In the Navigator tree on the left, under ADFS methods, expand the “CertificateWSTrustBinding\_IWSTrust13Async” branch down to “Request 1” level. Double-click “Request 1”.

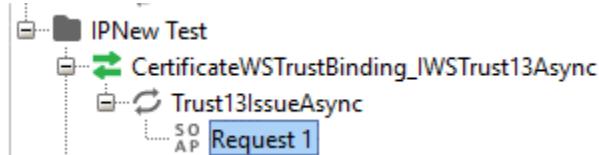

In the XML view in the left pane, replace the green XML comments with the following XML:

```
<ns:RequestType>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Issue</ns:RequestType>

<wsp:AppliesTo xmlns:wsp="http://schemas.xmlsoap.org/ws/2004/09/policy">

<EndpointReference xmlns="http://www.w3.org/2005/08/addressing">

<Address>https://ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT/Services/SOAPFGSZNNOService.svc</Address>

</EndpointReference>

</wsp:AppliesTo>

<ns:KeyType>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Bearer</ns:KeyType>
```

Make sure that the Address XML element contains the correct Web service address (modify as necessary).

Click “Auth” at the bottom of the window, in the window that appears, select “Add New Authorization Item” from the “Authorization” box, and then in the popup window the “Basic” option. From the Outgoing WSS list select the “clientCert” configuration.

Authorization: Basic

Username:	<input type="text"/>
Password:	<input type="password"/>
Domain:	<input type="text"/>
Pre-emptive auth:	<input checked="" type="radio"/> Use global preference <input type="radio"/> Authenticate pre-emptively
Outgoing WSS:	<input type="button" value="clientCert"/>
Incoming WSS:	<input type="button"/>

**Auth (Basic)** Headers (0) Attachments (0) WS-A WS-RM JMS Headers JMS Properties (0)

Click on the “WS-A” tab. Select the “Add default wsa:To” option.


Enable WS-A addressing:	<input checked="" type="checkbox"/>
Must understand:	<input type="button" value="NONE"/>
WS-A Version:	<input type="button" value="200508"/>
Add default wsa:Action:	<input type="checkbox"/> Add default wsa:Action
Action:	<input type="text" value="http://docs.oasis-open.org/ws-sx/ws-trust/200512/RST/Issue"/>
Add default wsa:To:	<input checked="" type="checkbox"/> Add default wsa:To
To:	<input type="text"/>
Reply to:	<input type="text"/>
RenlyTo Reference Parameters:	<input type="text"/>

**Auth (Basic)** Headers (0) Attachments (0) **WS-A** WS-RM JMS Headers JMS Property (0)

Click the green Play button to make the Web service call. The Web service reply that includes a SAML token is displayed in the right XML view.

#### *Creating a Token Request for username/password authentication*

In the Navigator tree on the left, under ADFS methods, expand the “UserNameWSTrustBinding\_IWSTrust13Async” branch down to “Request 1” level. Double-click “Request 1”.



In the left XML view, replace the <Soap:Header> element with the following XML fragment:

```
<soap:Header xmlns:wsa="http://www.w3.org/2005/08/addressing">
```

```

<wsse:Security soap:mustUnderstand="1" xmlns:wsse="http://docs.oasis-
open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd" xmlns:wsu="http://docs.oasis-
open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
  
```

```

<wsse:UsernameToken wsu:Id="UsernameToken-348E3F3C81E7E21F39152094195633514">
    <wsse:Username>testusername@ipnewtest.local</wsse:Username>
    <wsse:Password Type="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-username-
token-profile-1.0#PasswordText">password</wsse:Password>
</wsse:UsernameToken>
</wsse:Security>  <wsa:To>https://sts.test.rbp.eu/adfs/services/trust/13/usnamemixed</wsa:To>
</soap:Header>

```

In the XML view in the left pane, replace the green XML comments with the following XML:

```

<ns:RequestType>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Issue</ns:RequestType>
<wsp:AppliesTo xmlns:wsp="http://schemas.xmlsoap.org/ws/2004/09/policy">
    <EndpointReference xmlns="http://www.w3.org/2005/08/addressing">
        <Address>https://ipnew.test.fgsz.hu/Fgsz.Ip.Web.UAT/Services/SOAPFGSZNNOService.svc</Address>
    </EndpointReference>
</wsp:AppliesTo>
<ns:KeyType>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Bearer</ns:KeyType>

```

Make sure that the Address XML element contains the correct Web service address (modify as necessary).


Click the green “Play” button to make the web service call. The web service reply that includes a SAML token is displayed in the right XML view.

#### *Creating an IPNew Web Service Call Request*

1. From the XML View switch to the Raw View:



2. Copy a fragment of the XML that begins with <saml:Assertion> and ends with </saml:Assertion>. Pay close attention to make sure that there are no changes made to any character, no whitespaces or new lines inserted and that formatting is not changed because it will invalidate the digital signature.

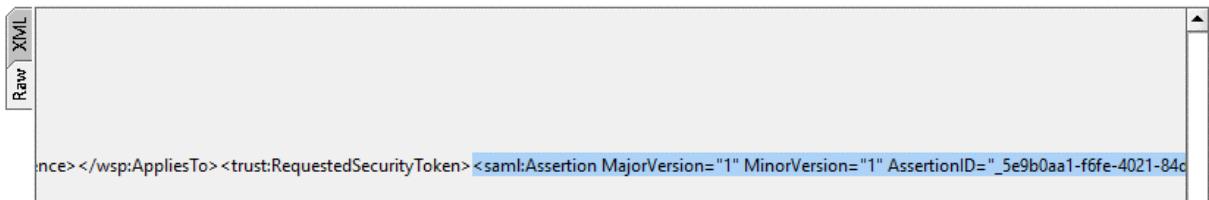

3. Copy the extracted part into the “saml” configuration item we created in an earlier step (“Enter SAML Assertion” field):

Name	Default Username/Alias	Default Password	Actor	Must Understand
clientCert				<input type="checkbox"/>
saml				<input type="checkbox"/>

SAML (XML)

Enter SAML Assertion

```

<saml:Assertion MajorVersion="1" MinorVersion="1" AssertionID="_0372ff09-84e9-468c-9f9a-880eb3f0ec6>

```

4. In the Navigator tree on the left, under IPNew web service methods, expand the desired branch down to “Request 1” level. Double-click “Request 1”.
5. Click “Auth” at the bottom of the window, in the window that appears, select “Add New Authorization Item” from the “Authorization” box, and then in the popup window the “Basic” option. From the Outgoing WSS list select the “saml” configuration.
6. Click on the “WS-A” tab. Select the “Add default wsa:To” option.
7. If necessary, edit the sample XML created by SoapUI.
8. Click the green “Play” button to make the web service call. The web service response is displayed in the right XML view.

Raw XML

```

<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope" xmlns:dom="http://</pre>
```

Raw XML

```

1 <s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope" xmlns:a="http://www.w3.org/2005/08/addressing">
2   <s:Header>
3     <a:Action s:mustUnderstand="1">http://domain.service.fgsz.hu/IFGSZNNOServiceSoapWrapper/CheckAliveResponse</a:Action>
4     <o:Security s:mustUnderstand="1" xmlns:o="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext#">
5       <u:Timestamp u:id="_0">
6         <u:Created>2018-09-02T09:11:03.596Z</u:Created>
7         <u:Expires>2018-09-02T09:16:03.596Z</u:Expires>
8       </u:Timestamp>
9     </o:Security>
10    </s:Header>
11    <s:body xmlns:xs="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://www.w3.org/2001/XMLSchema">
12      <CheckAliveResponse xmlns="http://domain.service.fgsz.hu">
13        <CheckAliveResult>The service is alive.</CheckAliveResult>
14      </CheckAliveResponse>
15    </s:Body>
16  </s:Envelope>

```

Enable WS-A addressing:

Must understand: NONE

WS-A Version: 200508

Add default wsa:Action:

Action: http://domain.service.fgsz.hu/IFGSZNNOServiceSoapWrapper/CheckAlive

Add default wsa:To:  Add default wsa:To

To:

Reply to:

Headers (6) Attachments (0) SSL Info (2 certs) WSS (0) JMS (0)

response time: 187ms (875 bytes)

## Known issues and error messages

- "**At least one security token in the message could not be validated.**" error: it's likely that some time has elapsed since invoking the ADFS web service and the validity of the token has expired. The ADFS web service must be called again to obtain a fresh token, and the saml configuration element must be updated with the new <SAML:Assertion> element.
- "**An error occurred when verifying security for the message.**" error, possible causes are:
  - If the <saml:Assertion> fragment was not copied from the Raw View, or if any character has changed compared to the original, then the system will assume that the message was compromised since the signature does not match the message. In this case carefully repeat the first three steps in section "Creating an IPNew Web Service Call Request" then execute the call again.
  - In case the certificate that is used for authentication contains accented characters (e.g. in the name field of the certificate owner) it may happen, that the token response is not encoded correctly in SOAP UI and the saml:Assertion section contains unreadable garbage characters. This causes an error with message "An error occurred when verifying security for the message." in subsequent web service calls. To work around this, correct the wrong characters and use the modified saml:Assertion XML in subsequent steps.

## Links

- WS-Trust 1.3 – OASIS: <http://docs.oasis-open.org/ws-sx/ws-trust/200512/ws-trust-1.3-os.html>
- SOAP 1.1: <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>
- SoapUI: <https://www.soapui.org/>